



DH-XVR1B08-I/T

8CH Penta-brid 1080N/720P Cooper 1U 1HDD WizSense Digital Video Recorder





Launched by Dahua Technology, WizSense is a series of Al products and solutions that adopt independent Al chip and deep learning algorithm. It focuses on human and vehicle with high accuracy, enabling users to fast act on defined targets. Based on Dahua's advanced technologies, WizSense provides intelligent, simple and inclusive products and solutions.

Series Overview

The Cooper-I/T Series offers simple and highly cost-effective HDCVI solutions. It provides 24/7 reliable monitoring with high-quality image performance, saving you on labor costs. It also includes a two-way talk function that is supported by all the channels and operates over coaxial cable, along with SMD Plus, offering you excellent value.

Functions

Two-way talk

Allows for seamless communication between the camera, client and recorder over coaxial cable, and offers instant voice intercom and timely audio alerts.

SMD Plus

With intelligent algorithm, Dahua Smart Motion Detection technology can categorize the targets that trigger motion detection and filter the motion detection alarm triggered by non-concerned targets to realize effective and accurate alarm.

- * Dolynk cloud compatible version: DMSS V2.0.1 and above, Dolynk Care V2.5.1 and above.
- 8-channel two-way talk over coaxial cable allows for seamless communication between the camera, client and recorder.
- 8-channel SMD Plus for analog channels which allows the device to trigger accurate alarms for humans and vehicles.
- 8-channel Al Coding saves on storage and bandwidth while maintaining the details of targets in videos.
- · Supports HDCVI, AHD, TVI, CVBS and IP video input.
- Supports up to 10-channel IP camera input and each channel can be up to 6 MP. The incoming bandwidth reaches 40 Mbps.
- Supports accessing Wi-Fi cameras, making it suitable for a wide range of scenes.
- · Smart H.265+ and H.265 dual-stream video compression.















Smart Dual Light

With Smart Dual Light technology, you can select Smart Illumination Mode for the system to automatically switch between IR mode and white light mode. It allows white light to be turned on when a target is detected by the SMD Plus/Perimeter Protection function of Al-enabled XVR. This significantly reduces light pollution at night. Together with other modes, including IR Mode and White Light Mode, the smart dual light technology can meet the requirements of a wide variety of scenes.

One-click Arming/Disarming

With just one click, you can enable or disable alarm linkages to show messages, send emails, output audio alarms and more, through the mobile app and platform.

Customizable Alarm Audio

Designed for your convenience, the TiOC alarm can be customized to meet your needs. It is flexible, allowing you to directly upload your customized audio through the mobile app and XVR.


AI Coding-ABR

Compared with H.265, AI coding-ABR can save 50% on storage costs, and save bit rate for complex scenes, which can prioritize image quality in dynamic scenes.



Technical Specificatio		
System		Backı
Main Processor	Industrial-grade processor	Playb
Operating System	Embedded Linux	Alar
Operating Interface	Web; Local GUI	Cana
SMD		Gene
SMD Plus by Recorder	8 channels: Secondary filtering for human and vehicle, reducing false alarms caused by leaves, rain and lighting condition change	Anon
SMD by Camera	10 channels	Intelli
Audio and Video		Alarm
Analog Camera Input	8 BNC ports, supports HDCVI/AHD/TVI/CVBS auto- detect	Port
Camera Input	1. CVI: 1080p@25/30 fps; 720p@25/30 fps. 2. TVI: 1080p@25/30 fps; 720p@25/30 fps. 3. AHD: 1080p@25/30 fps; 720p@25/30 fps.	Audio
	Up to 10 channels of IPC access	Audio
IP Camera Input	2 IP channels by default + 8 channels (analog channels are converted to IP channels) Incoming bandwidth: 40 Mbps, recording bandwidth: 40 Mbps and outgoing bandwidth: 40 Mbps *After IP extension is enabled, the AI Function (SMD) will be disabled.	Two-\
		Disk I
	Main stream: the 1st channel 1080N/720p@(1 fps-	USB
Encoding Capacity	25/30 fps), others 1080N/720p@(1 fps–15 fps); 960H/D1/CIF@(1 fps–25/30 fps) Sub stream: CIF@(1 fps–7 fps)	HDM VGA
Dual-stream	Yes	Netw
Video Bit Rate	32 kbps-4096 kbps	Gen
Audio Sampling	8 kHz, 16 bit	Powe
Audio Bit Rate	64 kbps	Powe
Video Output	1 HDMI, 1 VGA HDMI: 1920 × 1080, 1280 × 1024, 1280 × 720 VGA: 1920 × 1080, 1280 × 1024, 1280 × 720	Net V
Multi-screen Display	When IP extension mode not enabled: 1/4/8/9 When IP extension mode enabled: 1/4/8/9/16	Produ
Third-party Camera Access	Panasonic; Sony; Hanwha; Axis; Arecont; ONVIF	Packa
Compression Standar	d	Oper
Video Compression	Al Coding; Smart H.265+; H.265; Smart H.264+; H.264	Opera
Audio Compression	G.711a; G.711u; PCM	Stora
Network		Opera
Network Protocol	HTTP; HTTPS; TCP/IP; IPv4; IPv6; RTSP; UDP; NTP; DHCP; DNS; SMTP; UPnP; IP Filter; FTP; DDNS; SNMP; Alarm Server; P2P; Auto Registration; IP Search (Supports IP camera, DVR, NVS, etc.)	Instal
Mobile Phone Access	iOS; Android	
Interoperability	ONVIF 24.06 (Profile T; Profile S; Profile G); CGI; SDK	
Browser	Chrome; IE; Safari; Edge; Firefox	
Recording Playback		
Record Mode	General; alarm; motion detection	

B device and network tant playback; general playback; event playback; tag hyback; smart playback botion detection; HDCVI alarm; camera external alarm; twork alarm; PIR alarm for (no disk, disk error, low space, low quota space; twork disconnection; IP conflict; MAC conflict); video s; video tampering; camera offline ID Plus cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on environment temperature.
pyback; smart playback potion detection; HDCVI alarm; camera external alarm; twork alarm; PIR alarm or (no disk, disk error, low space, low quota space; twork disconnection; IP conflict; MAC conflict); video s; video tampering; camera offline ID Plus cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
otion detection; HDCVI alarm; camera external alarm; twork alarm; PIR alarm or (no disk, disk error, low space, low quota space; twork disconnection; IP conflict; MAC conflict); video s; video tampering; camera offline ID Plus cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
twork alarm; PIR alarm or (no disk, disk error, low space, low quota space; twork disconnection; IP conflict; MAC conflict); video s; video tampering; camera offline ID Plus cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
twork disconnection; IP conflict; MAC conflict); video s; video tampering; camera offline ID Plus cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
cord; snapshot (panoramic); IPC external alarm tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
tput; audio; buzzer; log; preset; email channel RCA channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
channel BNC (Coaxial Audio) channel RCA axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
axial two-way talk: 8-channel BNC cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
cal and network user two-way talk: Shares the same dio input with the first channel ATA port, up to 6 TB. This limit varies depending on
2 rear USB 2.0 ports)
10/100 Mbps Ethernet port, RJ-45)
VDC, 1.5 A
W (without HDD)
7 kg (1.26 lb)
97 kg (2.14 lb)
7.0 mm × 204.3 mm × 41.5 mm (7.76" × 8.04" × 53") (W × D × H)
2.0 mm × 64.0 mm × 240.0 mm (13.07" × 2.52" × 15") (W × D × H)
0 °C to +45 °C (+14 °F to +113 °F)
0 °C to +60 °C (-4 °F to +140 °F)
%–90% (RH), non-condensing
sktop
-LVD: IEC 62368-1:2014 -EMC: EN IEC 61000-3-2:2019, EN 000-3-3:2013+A1:2019, EN 55032:2015+A11:2020,



Ordering Information				
Туре	Model	Description		
DIGITAL VIDEO RECORDER	DH-XVR1B08-I/T	8CH Penta-brid 1080N/ 720P Cooper 1U 1HDD WizSense Digital Video Recorder		
	DHI-SSD-V800S1TB	SSD		
	DH-NC650	802.11AC 650M WIRELESS ADAPTER		
Accessories (Optional)	DHI-SSD-V800S512G	SSD		
	DH-NC300	802.11AX 300M WIRELESS ADAPTER		
	DHI-SSD-V800S256G	SSD		

Accessories


Optional:

WIRELESS ADAPTER




WIRELESS ADAPTER

Dimensions (mm[inch])

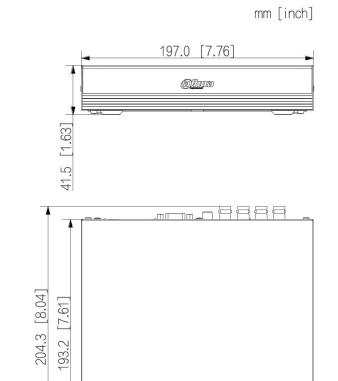

Panels

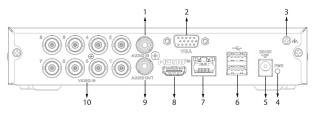

- 1 AUDIO IN, RCA Connector
- 3 Ground
- 5 Power Input
- 7 Network Port
- 9 AUDIO OUT, RCA Connector
- 2 VGA Port
- 4 Indicator Light
- 6 USB Ports
- 8 HDMI Port
- 10 VIDEO IN